

Overhead ladder

TG0505


This unit will be popular amongst those users looking to build up their upper body strength (especially their shoulders, arms and back).

Specification

1. 100% Made in Britain
2. Certified to EN16630, (legacy standards, BSI PAS888 - safety compliant for ALL ages, users and non-users & DIN79000 - safety compliant for users, aged 14+). All TGO outdoor gym equipment is free from exposed end stops, entrapments, sharp edges and crush points

ALWAYS ASK FOR EN16630 FOR OUTDOOR GYMS

3. Weatherproof
4. Low maintenance
5. Designs include key elements of Inclusive Fitness Initiative guidelines
6. TGO plant a tree in the NHS Forest for every piece of equipment sold
7. Anti vandal fixings
8. Available in all major RAL colours
9. Paint UV stabilised
10. Welds certified to EN15015614
11. Powder coated finish

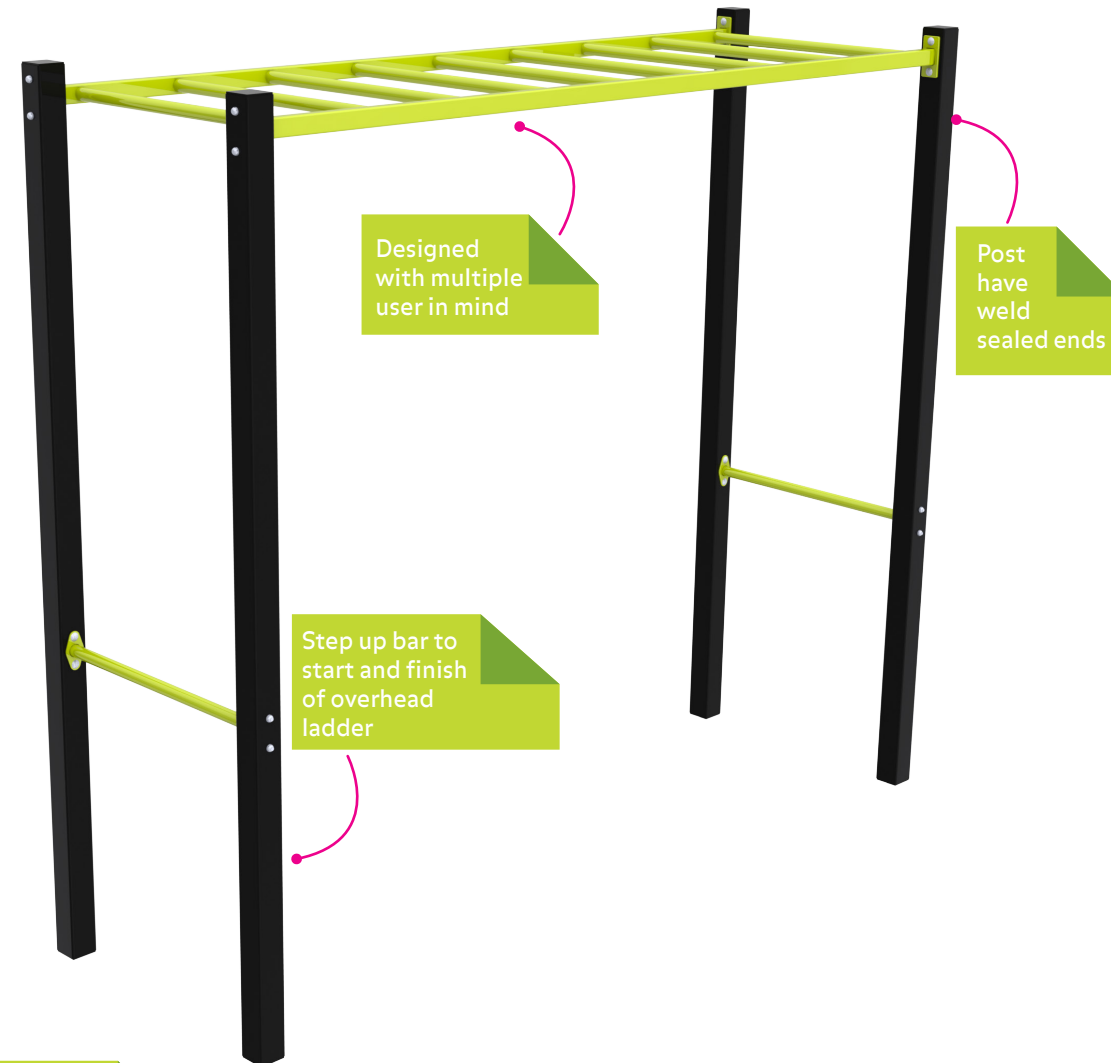

Guarantees

25 years steel work
2 years bearings
5 years paint





Overhead ladder

TG0505

Production Details

Manufacturer Standard: EN16630 (legacy standards - PAS888, Din79000)
 Framework: Mild Steel Grade S275 or Stainless Steel Grade 316 (min 3mm thick)
 Finish: E coat primer then High quality gloss finish polyester powder coat paint

Enhanced Corrosion Protection

An enhanced corrosion protection is available on request for this product. Hot dip galvanising is the process TGO use to add a protective coating to the body of our products on our equipment in coastal areas, which have higher air salinity or in harsh urban and industrial atmospheres with higher sulphur dioxide pollution*.

The upgrade includes:

- Upgrading to hot dip galvanising
- Fixings are upgraded from A2 to A4 stainless steel

*An upgrade to galvanised steel will be necessary for the warranty in these environments.

Installation

This product is installed 800mm directly into the ground. Please refer to the diagram opposite for safety spacing.

Safety

This product requires 1.5m of clear space around the equipment (green outline).

- Falling height: 0.95m

- Clear Space: 25.3m²

There is no safer surface requirement and therefore TGO only recommend a minimal surface area (grey outline).

Parts List

No	Part	Dimensions	Weight	Qty
1	Upright Post- Single 3.0	L100, W100, H3012	36.1 kg	4
2	Ladder	L3200, W1070, H152	31.9 kg	1

Clear Space Required Recommended Surfacing Base Plate & Centre Lines
 (25mm tolerance added in each direction)

